

Flying Fox Double

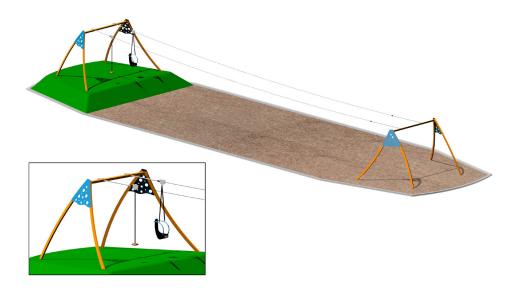

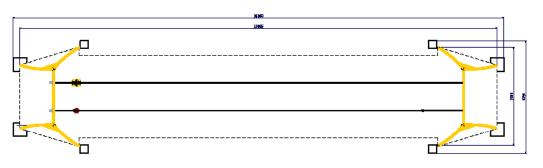

Always a favourite for all ages, the robust Flying fox with its contemporary design is a very popular option for larger regional parks. Engineered to withstand the rigours of constant public use, the Flying fox is built to stand the test of time.

This version requires a starting platform or mound at the correct height to be constructed as part of the site works. Please note that the Flyway is designed for a level site, although moderate variations can be absorbed by installing the main posts higher or lower as required. A choice of an all abilities seat or pommel seat is available.

WWW.FORPARKAUST.COM.AU

SPECIFICATIONS

Product Code: FS80

Age Range: 4-15 Years

Max Fall Height: 1500mm

Minimum Fall Zone: 212.22m²

Minimum Install Zone: 216.22m²

Millimum instatt Zone. Z10.ZZm

Equipment Size: 35065mm x 7330mm

Max Equipment Height: 3700mm

Max Load: Seat - 100kgs, Pommel - 120kgs

Play spaces: Parks, schools, commercial

MATERIALS


COLOURS	Frame: Standard Powder coat range Panels: Standard Powder coat range		
MATERIAL SPECS	Uprights: Galvanised Steel Top Rail: Galvanised Steel Panel: Aluminium Fasteners: Stainless Steel Mechanism: Stainless Steel Powder Coating: 80-120u		
















Flying Fox Double



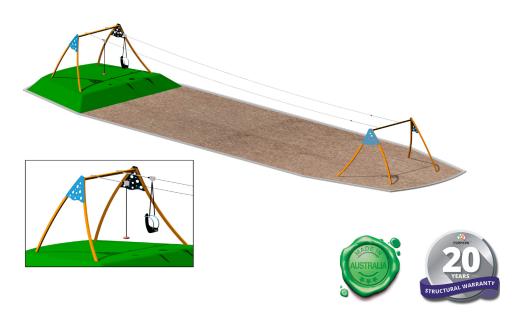

MATERIALS

Cable Tension Adjuster (High end)	Stainelss Steel. Bolts to rear of top bar with cable passing through the pole and into the adjuster.		Brake Springs (Top and bottom)	Stainless steel and rubber buffer	
Cable Anchor (Low end)	Stainless steel. Bolts to rear of top bar with cable passing through pole and into the anchor.		Cable	Galvanised, 10mm	
Cable Trolley	Stainless Steel Brake and finger protection		Uprights	125mm x 75mm x 3mm AllGal Steel, Powder coated	
			Top Bars	100mm x 100mm x 5mm AllGal Steel, Powder coated	
			Side Panels	6mm Aluminium plate	, Powder coated

STANDARDS

Complies with relevant Australian Standards including: AS 4685:2021 (P1-6) | AS 4685.0:2017 | AS 4422:2016